


# STRIP CURTAINS - CLEAR TRANSPARENT

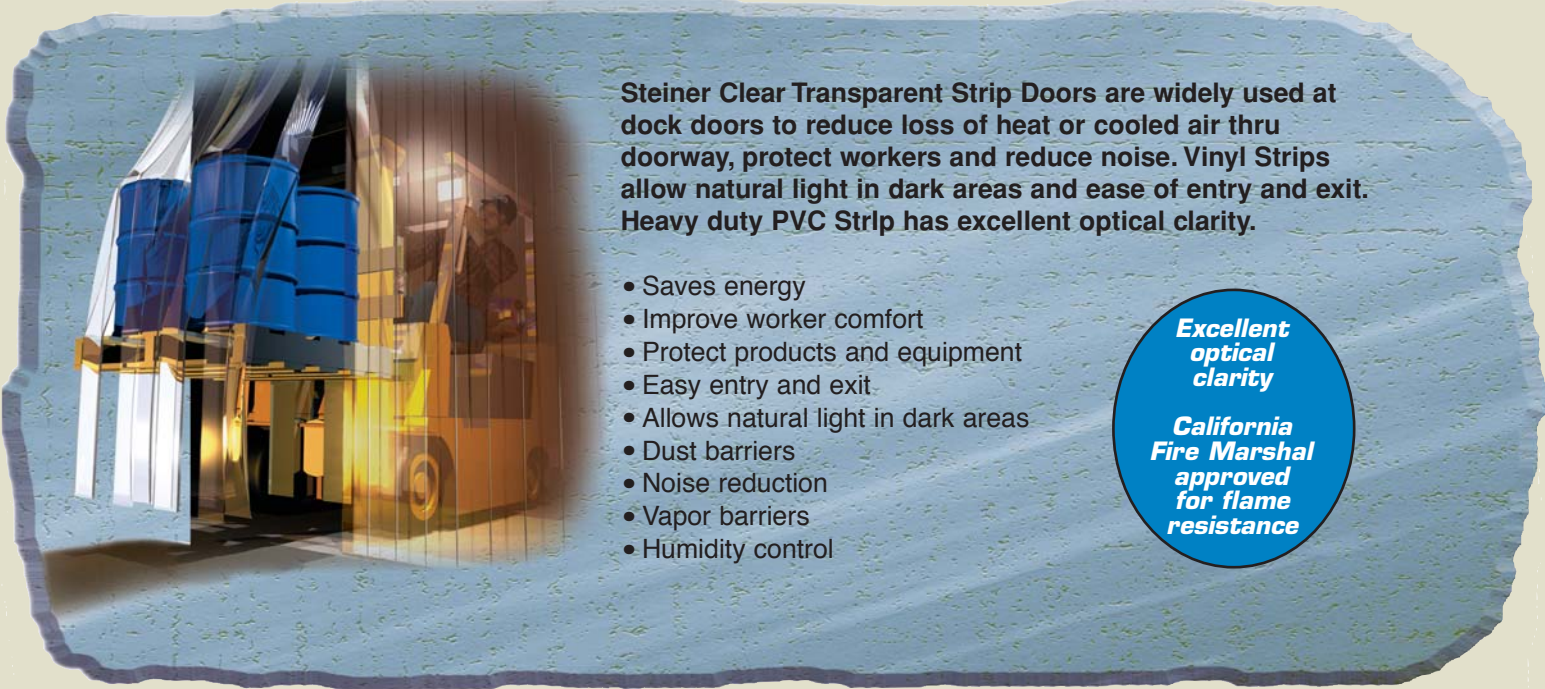

Steiner Clear Transparent Strip Doors are widely used at dock doors to reduce loss of heat or cooled air thru doorway, protect workers and reduce noise. Vinyl Strips allow natural light in dark areas and ease of entry and exit. Heavy duty PVC Strip has excellent optical clarity.

- Saves energy
- Improve worker comfort
- Protect products and equipment
- Easy entry and exit
- Allows natural light in dark areas
- Dust barriers
- Noise reduction
- Vapor barriers
- Humidity control

**Excellent optical clarity**

**California Fire Marshal approved for flame resistance**

## RECOMMENDATION FOR STRIP SIZE AND HEIGHT

Width	Thickness	Height	Application
8"	.080"	Up to 8' H	Reduces energy loss and protect against drafts. Normally for internal use.
12"	.120"	8' to 14' H	Heavy traffic, temperature and noise control. For internal or external use.
16"	.160"	14' to 20' H	Heavy vehicle traffic and sound attenuation. Normally for external use.

Note: Most commonly used overlaps are 1/2 & 2/3. Full overlap is used for extra thermal protection or noise reduction.

## TO ORDER CLEAR STRIP DOORS


- 1) Measure height and width of your door or opening
- 2) Select the width of the strip
- 3) Select the overlap desired
- 4) Select the item from the table Sold by Area (Square Foot)
- 5) Determine the mounting method, select hardware option (Universal Mount or Pipe Mount) and order by width of opening (bottom of pages 42 and 43)

## ORDER BY AREA (Sq. Ft), CUT TO LENGTH OR ROLL GOODS

MATERIAL SPECS			* SOLD BY AREA	SOLD BY LENGTH	
Width	Thickness	Overlap	Clear Strip	Clear Strip	Length
8"	.080"	1/2	73985	73908	Cut length
8"	.080"	Full	73980	63908	300 ft. roll
12"	.120"	2/3	73927	73912	Cut length
12"	.120"	Full	73920	63912	200 ft. roll
16"	.160"	1/2	73965	73916	Cut length
16"	.160"	Full	73960	63916	150 ft. roll

\* Priced by area (square foot)

## UNIVERSAL MOUNT STRIP DOOR HARDWARE



14-gauge galvanized steel mounting hardware is easily mounted to horizontal or vertical surfaces.

Permanent 1/4" threaded studs, on 2" centers allow the pre-punched strips easy and quick initial installation and strip replacement. Standard available lengths:

Length	3 ft.	4 ft.	5 ft.	6 ft.	8 ft.
Part No.	47403	47404	47405	47406	47408

## Hardware mounting options:

- Header-Overhead surface (inside door jamb lintel)
- Wall (above door jamb)
- Threaded Rod-Suspended from overhead beams

